

CE/EMC COMPLIANCE REPORT

For

Dongguan Jingheng Electron Co., Ltd.

P.A.Speaker

Prepared for : Dongguan Jingheng Electron Co., Ltd.

Address : Shenshan Industrial City, Hengli Town, Dongguan City,
Guangdong 523465, P.R. China

Prepared by : EST Technology Co., Ltd.

Address : Chilingxiang, Qishantou, Santun, Houjie, Dongguan,
Guangdong, China

Tel: 86-769-83081888

Fax: 86-769-83081878

Report No. : ESTE-E2012022

Date of Report : Dec. 07, 2020

TABLE OF CONTENTS

Test Report Declaration	Page
1. GENERAL PRODUCT INFORMATION	4
1.1. Product Function	4
1.2. Description of Device (EUT)	4
1.3. Difference between Model Numbers	4
1.4. Independent Operation Modes	5
2. TEST STANDARDS AND SITES	6
2.1. Description of Standards and Results	6
2.2. Test Facilities	7
2.3. List of Test and Measurement Instruments	8
3. TEST SET-UP AND OPERATION MODES	9
3.1. Principle of Configuration Selection	9
3.2. Block Diagram of Test Set-up	9
3.3. Test Operation Mode and Test Software	9
3.4. Special Accessories and Auxiliary Equipment	9
3.5. Countermeasures to Achieve EMC Compliance	9
4. EMISSION TEST RESULTS	10
4.1. Radiated Emission Test	10
5. IMMUNITY TEST RESULT	17
5.1. Description of Performance Criteria	17
5.2. Electrostatic Discharge Immunity Test	18
5.3. Radio Frequency Electromagnetic Field Immunity Test	20
5.4. Power Frequency Magnetic Field Immunity Test	23
6. PHOTOGRAPHS OF TEST SET-UP	24
6.1. Set-up for Radiated Emission Test	24
6.2. Set-up for Electrostatic Discharge Immunity Test	25
6.3. Set-up for Radio Frequency Electromagnetic Field Immunity Test	25
6.4. Set-up for Power Frequency Magnetic Field Immunity Test	26
7. PHOTOGRAPHS OF THE EUT	27

EST Technology Co., Ltd.

Applicant:	Dongguan Jingheng Electron Co., Ltd.		
Address:	Shenshan Industrial City, Hengli Town, Dongguan City, Guangdong 523465, P.R. China		
Manufacturer:	Dongguan Jingheng Electron Co., Ltd.		
Address:	Shenshan Industrial City, Hengli Town, Dongguan City, Guangdong 523465, P.R. China		
Factory:	Dongguan Jingheng Electron Co., Ltd.		
Address:	Shenshan Industrial City, Hengli Town, Dongguan City, Guangdong 523465, P.R. China		
E.U.T:	P.A.Speaker		
Model Number:	CSP-115,CSP-115D,CSP-115WP,CSP-115DWP,CSP-210, CSP-210D,CSP-210WP,CSP-210DWP,CSP-220,CSP-220D, CSP-220WP,CSP-220DWP,CSR-105,CSR-105Y,CSR-205, CSR-205Y,CSR-206,CSR-206Y,CSR-306,CSR-306Y		
Trade Name:	SHOW, TOPP PRO	Serial No.:	-----
Date of Receipt:	Nov. 25, 2020	Date of Test:	Nov. 27, -Dec. 03, 2020
Test Specification:	EN 55032:2015 EN IEC 61000-3-2:2019 EN 61000-3-3:2013+A1:2019 EN 55035:2017		
Test Result:	The equipment under test was found to be compliance with the requirements of the standards applied.		
		Issue Date: Dec. 07, 2020	
Prepared by:	Reviewed by:	Approved by:	
			
Lena / Assistant	Bible / Engineer	Iceman Hu / Manager	
Other Aspects:			
None.			
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd. The statement of compliance in this report is based on the limit in the test standard, the measurement uncertainty is not considered.			

1. GENERAL PRODUCT INFORMATION

1.1. Product Function

Refer to Technical Construction Form and User Manual.

1.2. Description of Device (EUT)

Description : P.A.Speaker
 Model No. : CSP-115D, CSP-220D, CSR-306Y
 System Input Voltage : AC 100V
 Output : Unshielded, Detachable 0.5 m

1.3. Difference between Model Numbers

Model	Trade Name	Input voltage	Rated Power	Whether with OT transformer	Transformer power	Horn power. Impedance	Model differences
CSP-115	SHOW	50V/70V/100V	15W	TA00008	15W	5.5" 15W 8 Ω * 1PCS	The CSP series is the PROJECTOR SPEAKER, the CSR series is the SPHERE SPEAKER, D represents the transmitting 2PCS of two-way speakers, WP represents the waterproofing function, and Y represents the installation accessory of the turntable YS-30
CSP-115D	SHOW	50V/70V/100V	15W	TA00008	15W	5.5" 15W 8 Ω * 2PCS	
CSP-115WP	SHOW	50V/70V/100V	15W	TA00008	15W	5.5" 15W 8 Ω * 1PCS	
CSP-115DWP	SHOW	50V/70V/100V	15W	TA00008	15W	5.5" 15W 8 Ω * 2PCS	
CSP-210	SHOW	50V/70V/100V	10W	TA00016	10W	6.5" 30W 8 Ω * 1PCS	
CSP-210D	SHOW	50V/70V/100V	10W	TA00016	10W	6.5" 30W 8 Ω * 2PCS	
CSP-210WP	SHOW	50V/70V/100V	10W	TA00016	10W	6.5" 30W 8 Ω * 1PCS	
CSP-210DWP	SHOW	50V/70V/100V	10W	TA00016	10W	6.5" 30W 8 Ω * 2PCS	
CSP-220	SHOW	50V/70V/100V	20W	TA00015	20W	6.5" 30W 8 Ω * 1PCS	
CSP-220D	SHOW	50V/70V/100V	20W	TA00015	20W	6.5" 30W 8 Ω * 2PCS	
CSP-220WP	SHOW	50V/70V/100V	20W	TA00015	20W	6.5" 30W 8 Ω * 1PCS	
CSP-220DWP	SHOW	50V/70V/100V	20W	TA00015	20W	6.5" 30W 8 Ω * 2PCS	
CSR-105	SHOW	70V/100V	10W	TA00009	10W	5" 15W 6 Ω * 1PCS	
CSR-105Y	SHOW	70V/100V	10W	TA00009	10W	5" 15W 6 Ω * 1PCS	
CSR-205	SHOW	70V/100V	20W	TA00017	20W	5" 30W 6 Ω	

		V				* 1PCS	
CSR-205Y	SHOW	70V/100 V	20W	TA00017	20W	5" 30W 6 Ω * 1PCS	
CSR-206	SHOW	70V/100 V	20W	TA00020	20W	6.5" 30W 8 Ω * 1PCS	
CSR-206Y	SHOW	70V/100 V	20W	TA00020	20W	6.5" 30W 8 Ω * 1PCS	
CSR-306	SHOW	70V/100 V	30W	TA00036	30W	6.5" 30W 8 Ω * 1PCS	
CSR-306Y	SHOW	70V/100 V	30W	TA00036	30W	6.5" 30W 8 Ω * 1PCS	

1.4. Independent Operation Modes

The basic operation modes are:

1.4.1. Working

2. TEST STANDARDS AND SITES

2.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION(EN 55032:2015)				
Description of Test Item	Standard	Limits		Results
Conducted disturbance at mains terminals	EN 55032:2015	Class B		N/A
		Minimum passing margin is ***dB at ***MHz		
Asymmetric mode conducted emissions	EN 55032:2015	Class B		N/A
		More than *** dB below the limit line.		
Radiated disturbance	EN 55032:2015	Class B		PASS
		Minimum passing margin is 12.25dB at 962.17MHz		
Harmonic current emissions	EN IEC 61000-3-2:2019	-----		N/A
Voltage fluctuations & flicker	EN 61000-3-3:2013+A1:2019	-----		N/A
IMMUNITY (EN 55035:2017)				
Description of Test Item	Basic Standard	Performance Criteria	Observation Criteria	Results
Electrostatic discharge (ESD)	EN 61000-4-2:2009	B	B	PASS
Radio-frequency, Continuous radiated disturbance	EN 61000-4-3:2006+A1:2008+A2:2010	A	A	PASS
Electrical fast transient (EFT)	EN 61000-4-4:2012	B	*	N/A
Surge (Input a.c. power port)	EN 61000-4-5:2014	B	*	N/A
Radio-frequency,Continuous conducted disturbance	EN 61000-4-6:2014	A	*	N/A
Power frequency magnetic field	EN 61000-4-8:2010	A	A	PASS
Voltage dips, >95% reduction	EN 61000-4-11:2004	B	*	N/A
Voltage dips, 30% reduction		C	*	N/A
Voltage interruptions		C	*	N/A
N/A is an abbreviation for Not Applicable.				

2.2. Test Facilities

EMC Lab : Certificated by CNAS, CHINA
Registration No.: L5288
This Certificate is valid until: November 12, 2023

Certificated by FCC, USA
Designation Number: CN1215
This Certificate is valid until: January 31, 2022

Certificated by A2LA, USA
Registration No.: 4366.01
This Certificate is valid until: January 31, 2022

Certificated by Industry Canada
CAB identifier No.: CN0035
This Certificate is valid until: January 31, 2022

Certificated by VCCI, Japan
Registration No.: C-14103; T-20073; R-13663;
R-20103; G-20097
Date of registration: Apr. 20, 2020
This Certificate is valid until: Apr. 19, 2023

Certificated by TUV Rheinland, Germany
Registration No.: UA 50413872 0001
Date of registration: July 31, 2018

Certificated by Intertek
Registration No.: 2011-RTL-L2-64
Date of registration: November 08, 2018

Name of Firm : EST Technology Co., Ltd.

Site Location : Chilingxiang, Qishantou, Santun, Houjie, Dongguan,
Guangdong, China

2.3.List of Test and Measurement Instruments

2.3.1. For radiated emission test (2# 966 radiation)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESCI3	EST-E071	June 13,20	1 Year
Bilog Antenna	Teseq	CBL 6111D	EST-E053	June 13,20	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A

2.3.2. For electrostatic discharge immunity test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
ESD Generator	HAEFELY	ONYX16	EST-E013	June 13,20	1 Year

2.3.3. Radio Frequency Electromagnetic Field Immunity (R/S) Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Signal Generator	Agilent	N5181A	EST-E060	June 13,20	1 Year
Power Amplifier	SKET	HAP801000M-250W	EST-E061	N/A	N/A
Power Amplifier	SKET	HAP0103G-75W	EST-E062	N/A	N/A
Power Amplifier	SKET	HAP0306G-50W	EST-E063	N/A	N/A
Power Meter	Agilent	E4419B	EST-E064	June 13,20	1 Year
Power sensor	Agilent	E9301A	EST-E065	June 13,20	1 Year
Power sensor	HP	E9301A	EST-E066	June 13,20	1 Year
Antenna	Schwarzbeck	STLP 9129	EST-E059	N/A	N/A
E-Field Probe	Narda	EP-601	EST-E067	June 13,20	1 Year
Test Software	SKET	EMC-S	V1.2.0.48	N/A	N/A

2.3.4.For power frequency magnetic field immunity test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Magnetic Field Tester	HAEFELY	MFS 100	EST-E018	June 13,20	1 Year

Note: All calibration reports of the equipment were provided by LiSai calibration and Testing

3. TEST SET-UP AND OPERATION MODES


3.1. Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the Operating Instructions.

Immunity: The equipment under test (EUT) was configured to the representative operating mode and conditions.

3.2. Block Diagram of Test Set-up

System Diagram of Connections Between EUT and Simulators

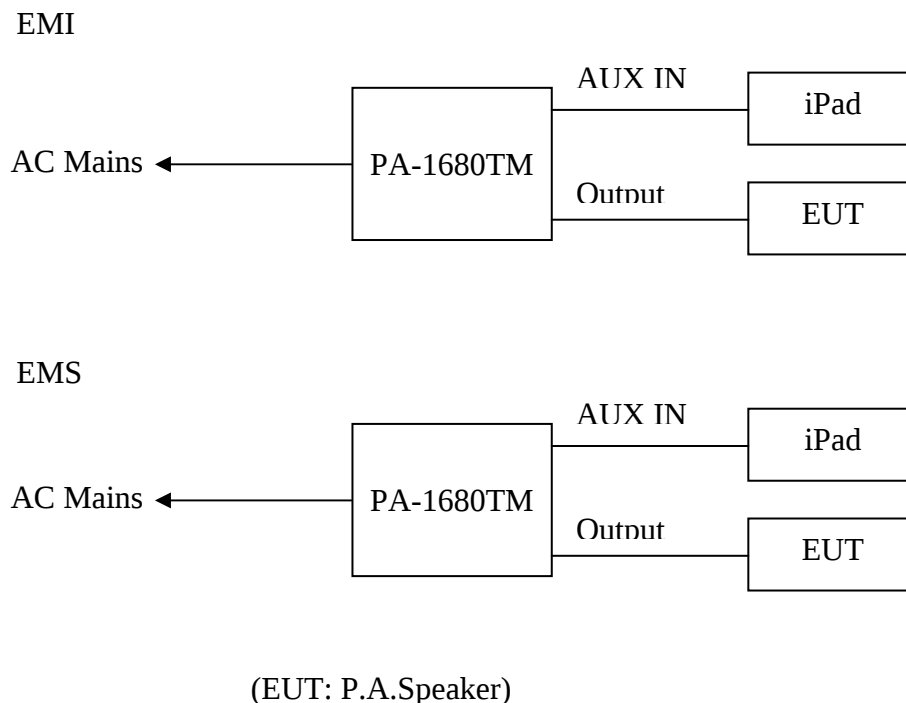

3.3. Test Operation Mode and Test Software

Refer to Test Setup in clause 4 & 5.

3.4. Special Accessories and Auxiliary Equipment

3.4.1.iPad

M / N : A1893
S / N : DMPY3KL5JF8K
Manufacturer : Apple

3.5. Countermeasures to Achieve EMC Compliance

None.

4. EMISSION TEST RESULTS

4.1. Radiated Emission Test

RESULT : **Pass**
Test procedure : EN 55032:2015
Frequency range : 30~1000MHz
Test Site : 2#966 Chamber
Limits : EN 55032:2015 Class B


Test Setup

Date of test : Nov. 27, 2020
Model No. : CSP-115D, CSP-220D, CSR-306Y
Input Voltage : AC 100V From PA-1680TM Input AC 230V/50Hz
Operation Mode : Working

The EUT was placed on a turn table which was 0.8 m above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was set 3 m distance from the receiving antenna which was mounted on an antenna tower. The measuring antenna moved up and down to find out the maximum emission level. It moved from 1 m to 4 m for both horizontal and vertical polarizations.

The EUT was tested in the Chamber Site. It was pre-scanned with a Peak detector from the spectrum, and all the final readings from the test receiver were measured with the Quasi-Peak detector.

The bandwidth setting on the test receiver was 120 kHz.

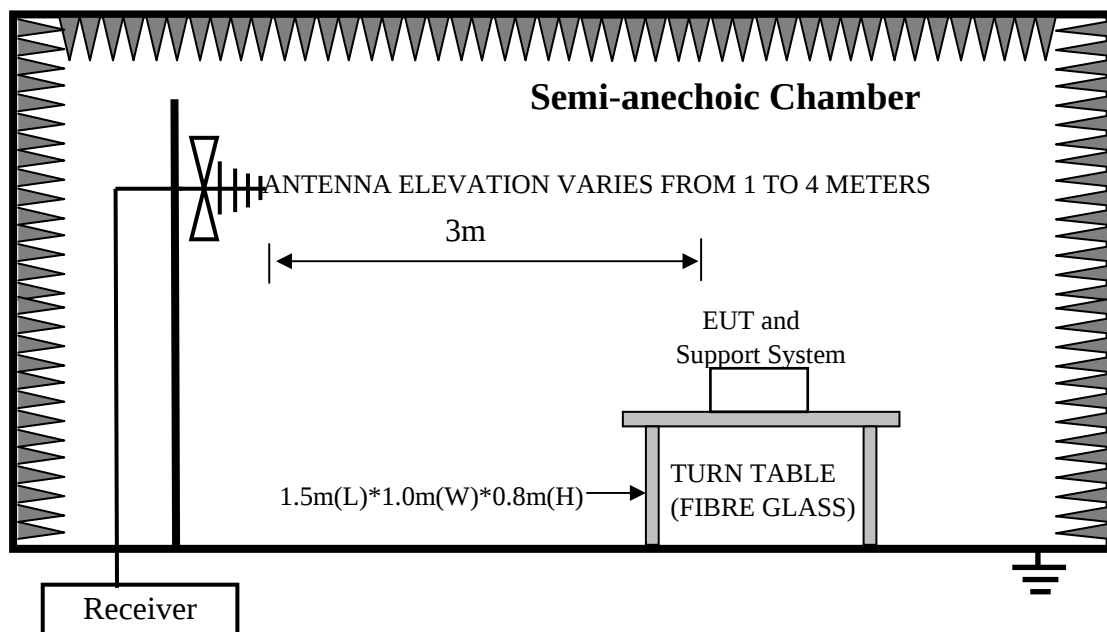

Note:

Test uncertainty: ± 4.26 dB (H); ± 4.74 dB (V) at a level of confidence of 95%.(2#966)

Test Data


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 824

File: \\EMC-966-2\\test data\\2020\\JJingheng.EM6 (849)

Date: 2020-11-27

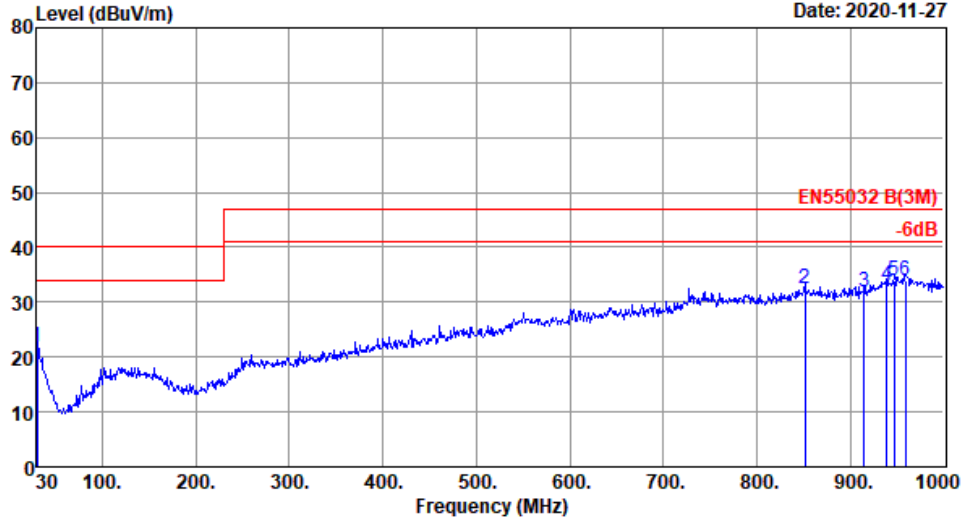

Site no. : 2# 966 chamber Data no. : 824
Dis. / Ant. : 3m 47018 Ant. pol. : HORIZONTAL
Limit : EN55032 B(3M)
Env. / Ins. : Temp:23.5'; Humi:53.6%; Press:101.52kPa
Engineer : Frank
EUT : P.A.Speaker
Power : AC 100V From PA-1680TM Input AC230V/50Hz
M/N : CSR-306Y
Test Mode : Working

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.00	18.22	0.19	3.37	21.78	40.00	18.22	QP
2	851.59	23.32	3.16	5.90	32.38	47.00	14.62	QP
3	914.64	23.42	3.37	5.19	31.98	47.00	15.02	QP
4	938.89	24.72	3.63	4.81	33.16	47.00	13.84	QP
5	946.65	24.91	3.93	5.14	33.98	47.00	13.02	QP
6	959.26	25.20	4.06	4.76	34.02	47.00	12.98	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.



Data: 825

File: \\EMC-966-2\test data\2020\JJingheng.EM6 (849)

Date: 2020-11-27

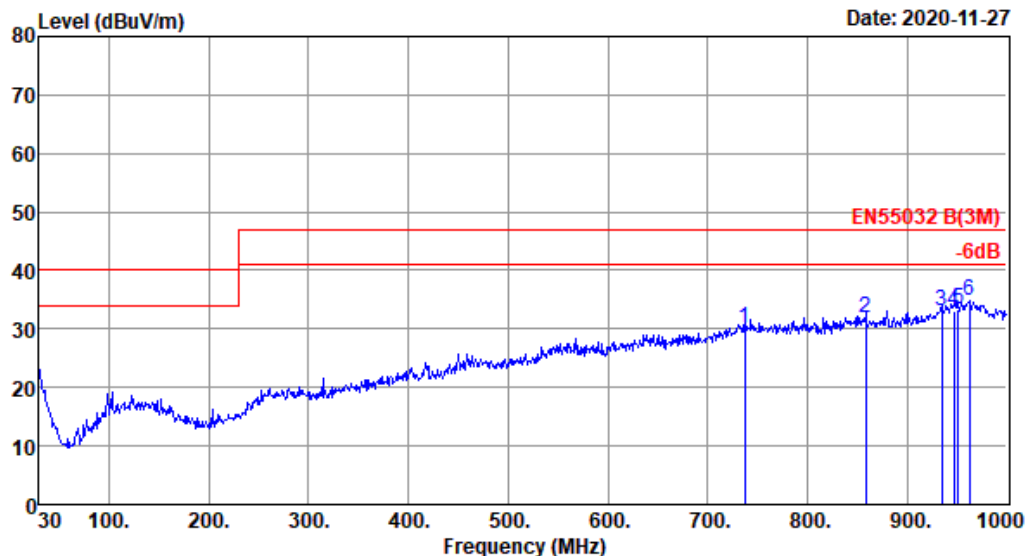

Site no. : 2# 966 chamber Data no. : 825
 Dis. / Ant. : 3m 47018 Ant. pol. : VERTICAL
 Limit : EN55032 B(3M)
 Env. / Ins. : Temp:23.5'; Humi:53.6%; Press:101.52kPa
 Engineer : Frank
 EUT : P.A.Speaker
 Power : AC 100V From PA-1680TM Input AC230V/50Hz
 M/N : CSR-306Y
 Test Mode : Working


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	737.13	22.31	3.07	4.70	30.08	47.00	16.92	QP
2	858.38	23.31	3.16	5.30	31.77	47.00	15.23	QP
3	935.01	24.50	3.67	4.78	32.95	47.00	14.05	QP
4	946.65	24.91	3.93	4.28	33.12	47.00	13.88	QP
5	951.50	25.02	3.87	4.49	33.38	47.00	13.62	QP
6	962.17	25.20	3.90	5.65	34.75	47.00	12.25	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

Data: 826

File: \\EMC-966-2\\test data\\2020\\JJingheng.EM6 (849)

Date: 2020-11-27

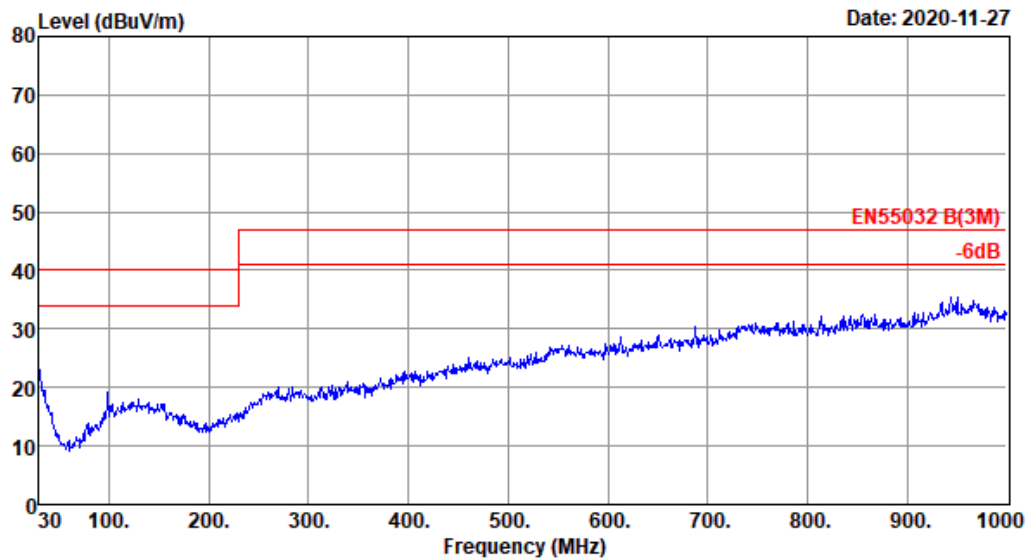


Site no. : 2# 966 chamber Data no. : 826
Dis. / Ant. : 3m 47018 Ant. pol. : VERTICAL
Limit : EN55032 B(3M)
Env. / Ins. : Temp:23.5';Humi:53.6%;Press:101.52kPa
Engineer : Frank
EUT : P.A.Speaker
Power : AC 100V From PA-1680TM Input AC230V/50Hz
M/N : CSP-115D
Test Mode : Working

Data: 827

File: \\EMC-966-2\\test data\\2020\\JJingheng.EM6 (849)

Date: 2020-11-27

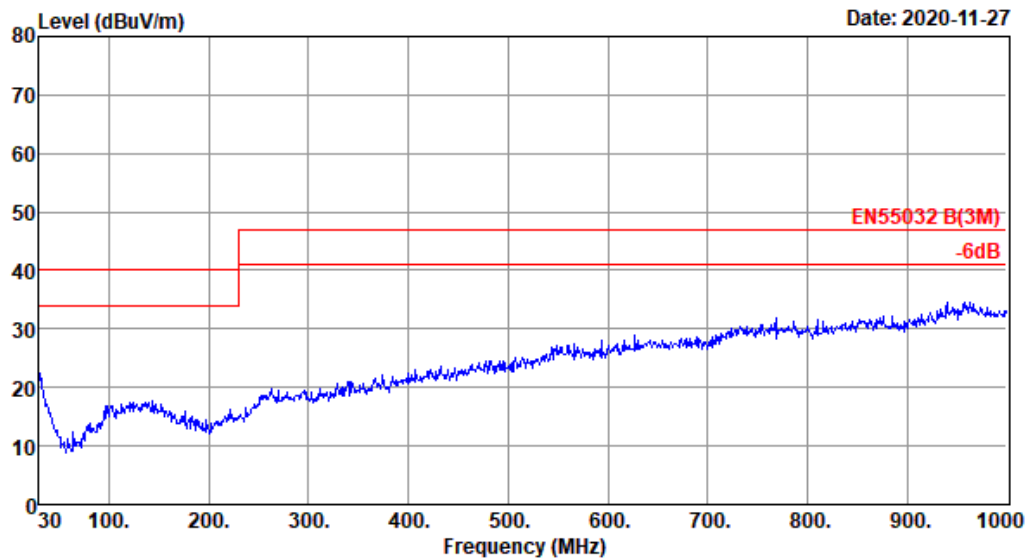


Site no. : 2# 966 chamber Data no. : 827
Dis. / Ant. : 3m 47018 Ant. pol. : HORIZONTAL
Limit : EN55032 B(3M)
Env. / Ins. : Temp:23.5';Humi:53.6%;Press:101.52kPa
Engineer : Frank
EUT : P.A.Speaker
Power : AC 100V From PA-1680TM Input AC230V/50Hz
M/N : CSP-115D
Test Mode : Working

Data: 828

File: \\EMC-966-2\\test data\\2020\\JJingheng.EM6 (849)

Date: 2020-11-27

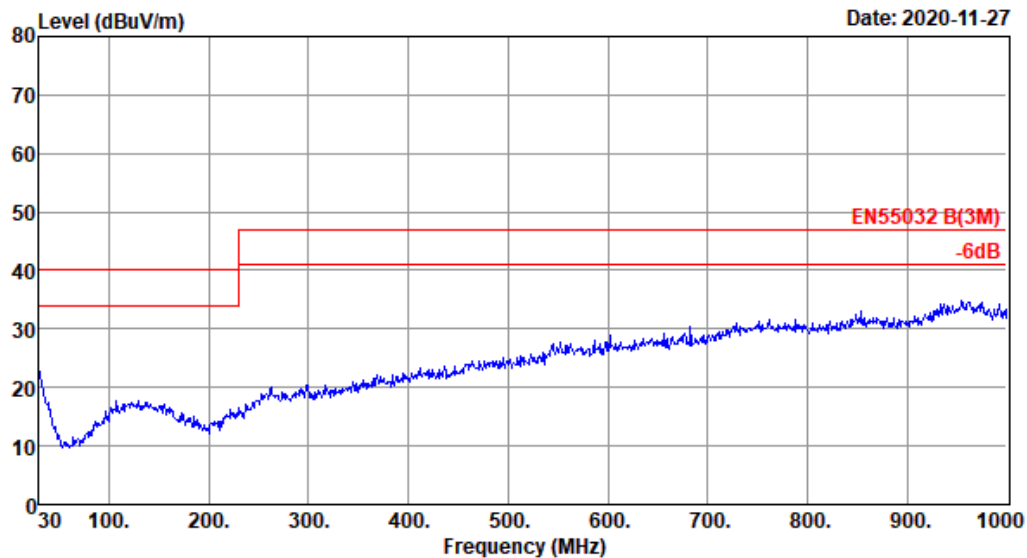


Site no. : 2# 966 chamber Data no. : 828
Dis. / Ant. : 3m 47018 Ant. pol. : HORIZONTAL
Limit : EN55032 B(3M)
Env. / Ins. : Temp:23.5';Humi:53.6%;Press:101.52kPa
Engineer : Frank
EUT : P.A.Speaker
Power : AC 100V From PA-1680TM Input AC230V/50Hz
M/N : CSP-220D
Test Mode : Working

Data: 829

File: \\EMC-966-2\\test data\\2020\\JJingheng.EM6 (849)

Date: 2020-11-27

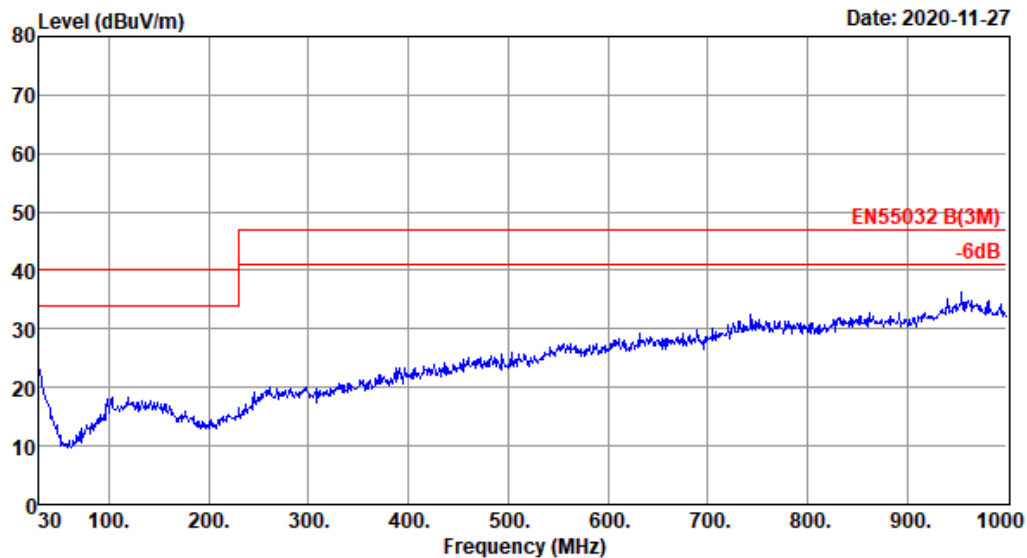

Site no. : 2# 966 chamber Data no. : 829
Dis. / Ant. : 3m 47018 Ant. pol. : VERTICAL
Limit : EN55032 B(3M)
Env. / Ins. : Temp:23.5';Humi:53.6%;Press:101.52kPa
Engineer : Frank
EUT : P.A.Speaker
Power : AC 100V From PA-1680TM Input AC230V/50Hz
M/N : CSP-220D
Test Mode : Working

5. IMMUNITY TEST RESULT

5.1. Description of Performance Criteria:

Performance criteria A

The equipment shall continue to operate as intended without operator intervention. No degradation of performance, loss of function or change of operating state is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

For audio output device: The measured acoustic interference ratio and/or the measured electrical interference during the test shall be -20dB or better(see note1)

Performance criteria B

During the application of the disturbance, degradation of performance is allowed. However, no unintended change of actual operating state or stored data is allowed to persist after the test.

After the test, the equipment shall continue to operate as intended without operator intervention; no degradation of performance or loss of function is allowed, below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.

If the minimum performance level (or the permissible performance loss), or recovery time, is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

Performance criteria C

Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. A reboot or re-start operation is allowed.

Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

Note 1: This performance criterion only using for Continuous inducted RF disturbances and Continuous RF electromagnetic field disturbances item.

5.2. Electrostatic Discharge Immunity Test

RESULT : **Pass**

Test procedure : EN 55035:2017

Basic standard : EN 61000-4-2:2009

Test specification : +/-4.0kV(Contact discharge)
+/-8.0kV(Air discharge)

Number of discharges : ≥ 10 (Air discharge for single polarity discharge)
 ≥ 10 (Contact discharge for single polarity discharge)

Polarity : Positive/Negative

Performance criterion : B

Test Setup

Date of test : Dec. 01, 2020

Model No. : CSP-115D, CSP-220D, CSR-306Y

Input Voltage : AC 100V From PA-1680TM Input AC 230V/50Hz

Operation Mode : Working

Temperature : 23.1°C

Humidity : 54.2%

Pressure : 101.32kPa

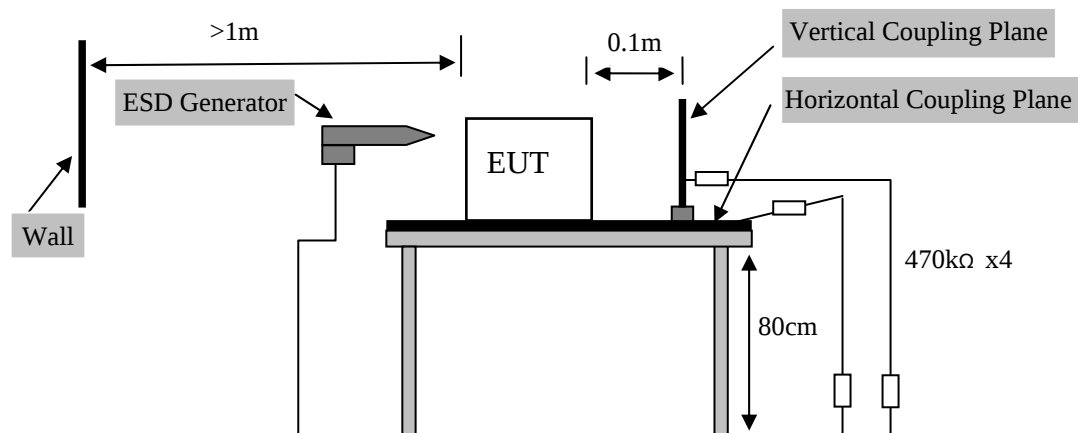


Table 1: Electrostatic Discharge Immunity Test Result

Discharge Location		Type of discharge	Result
HCP	4 points	Contact	Pass
VCP	4 points	Contact	Pass
Screw	2 points	Contact	Pass
Input Port	4 points	Contact	Pass
Crust	1 point	Contact	Pass
Slots	4 points	Air	Pass

*Remark: 1. The Voice appeared noise during the test, but self-recoverable after the test
2. Discharge should be considered on Contact and Air and Horizontal Coupling Plane (HCP) and Vertical Coupling Plane (VCP).*

5.3. Radio Frequency Electromagnetic Field Immunity Test

RESULT : **Pass**
Test procedure : EN 55035:2017
Basic standard : EN 61000-4-3:2006+A1:2008+A2:2010
Frequency Range : 80-1000MHz,1800MHz, 2600MHz, 3500MHz, 5000MHz
Performance criterion : A
Test site : 866 Chamber

Test Setup


Date of test : Dec. 01, 2020
Model No. : CSP-115D, CSP-220D, CSR-306Y
Input Voltage : AC 100V From PA-1680TM Input AC 230V/50Hz
Operation Mode : Working
Temperature : 23.1°C
Humidity : 54.4%
Pressure : 101.32kPa

The EUT and its simulators were placed on a turn table which was 0.8 meter above the ground. The EUT was set 3 m away from the transmitting antenna which was mounted on an antenna tower. Both horizontal and vertical polarization of the antenna were set on test. Each of the four sides of EUT must be faced this transmitting antenna and measured individually.

In order to judge the EUT performance, a CCD camera was used to monitor EUT screen.

All the scanning conditions were as follows:

Condition of Test	Remarks
1. Field Strength	3 V/m (Severity Level 2)
2. Radiated Signal	Modulated
3. Scanning Frequency	80 - 1000 MHz
4. Sweeping time of radiated	0.0015 decade/s
5. Dwell Time	at least 3 seconds

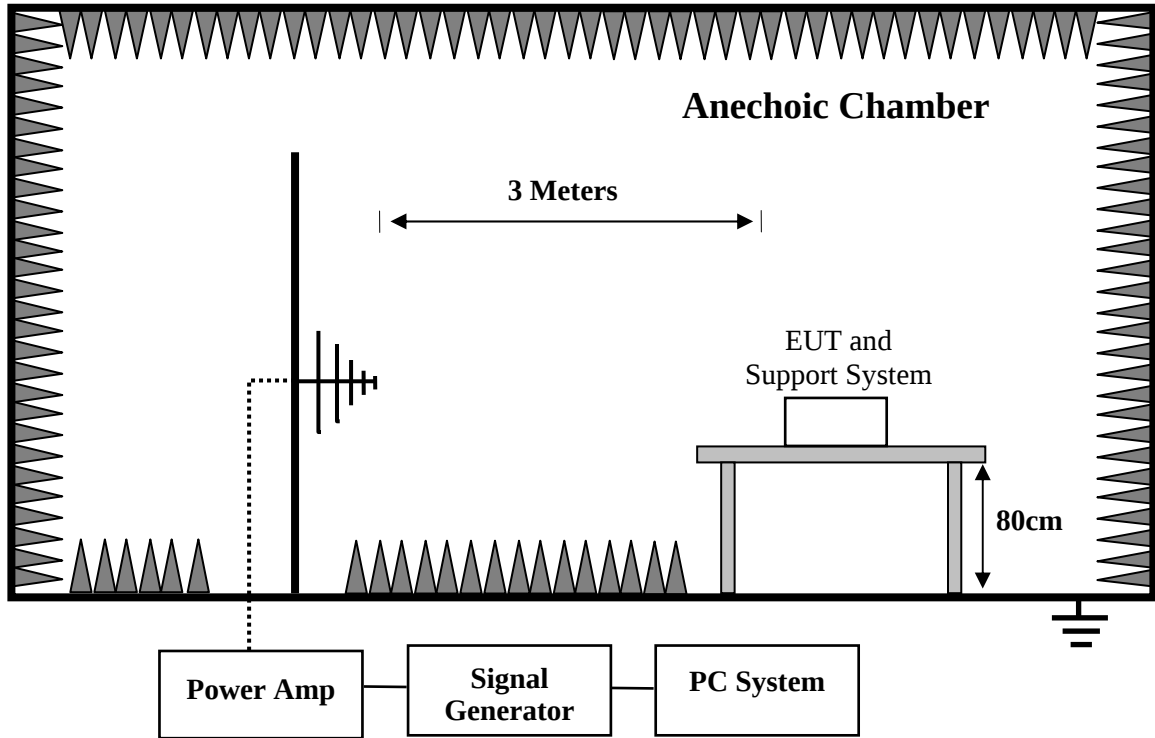

Condition of Test	Remarks
6. Field Strength	3 V/m (Severity Level 2)
7. Radiated Signal	Modulated
8. Scanning Frequency	1800MHz,2600MHz,3500MHz,5000MHz
9. Sweeping time of radiated	0.0015 decade/s
10. Dwell Time	at least 3 seconds

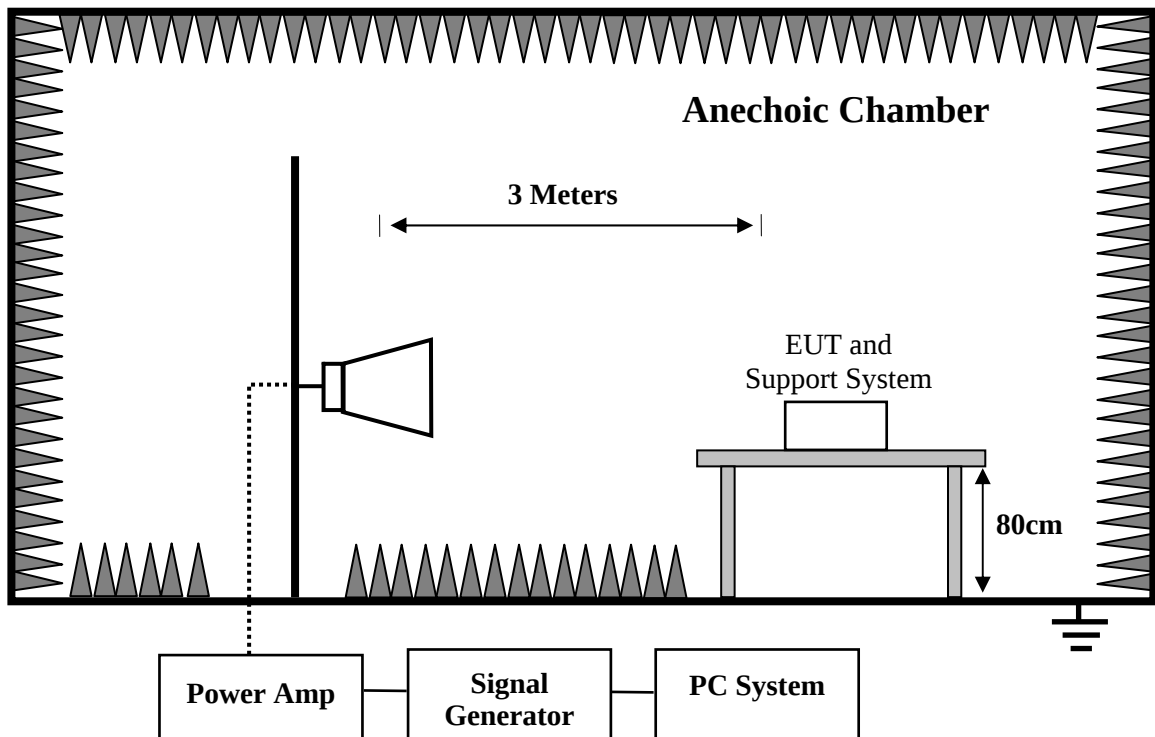


Table 2: Radio Frequency Electromagnetic Field Immunity Test Result

Position	Frequency Range	Test Level	Modulated Signal	Freq. Step	Dwell Time	Result
Front	80 to 1000 MHz, 1800MHz, 2600MHz, 3500MHz, 5000MHz	3 V/m	AM 80%, 1kHz sine wave	1%	3 s	Pass
Right						
Rear						
Left						
Remark: There was no change compared with initial operation during the test.						

5.4. Power Frequency Magnetic Field Immunity Test

RESULT : **Pass**
Test procedure : EN 55035:2017
Basic standard : EN 61000-4-8:2010
Test specification : 1 A/m
Performance criterion : A

Test Setup

Date of test : Dec. 01, 2020
Model No. : CSP-115D, CSP-220D, CSR-306Y
Input Voltage : AC 100V From PA-1680TM Input AC 230V/50Hz
Operation Mode : Working
Temperature : 23.1°C
Humidity : 54.2%
Pressure : 101.32kPa

The EUT was subjected to the test magnetic field by using the induction coil of standard dimensions (1m*1m). The induction coil then was rotated by 90° in order to expose the EUT to the test field with different orientations.

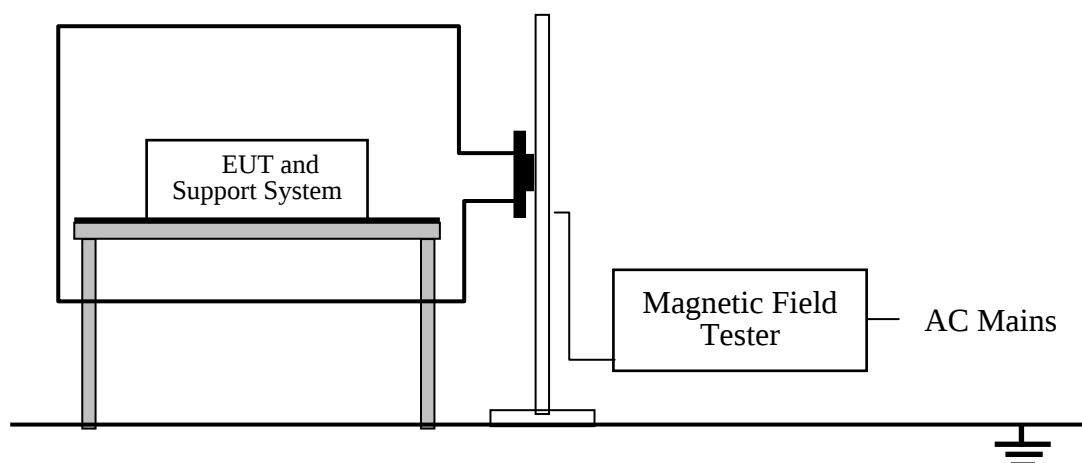




Table 6: Power Frequency Magnetic Field Immunity Test Result

Test Level	Testing Duration	Coil Orientation	Criterion	Result
1A/m	5 mins	X	A	Pass
1A/m	5 mins	Y	A	Pass
1A/m	5 mins	Z	A	Pass

Remark: There was no change compared with initial operation during the test

6. PHOTOGRAPHS OF TEST SET-UP

6.1.Set-up for Radiated Emission Test

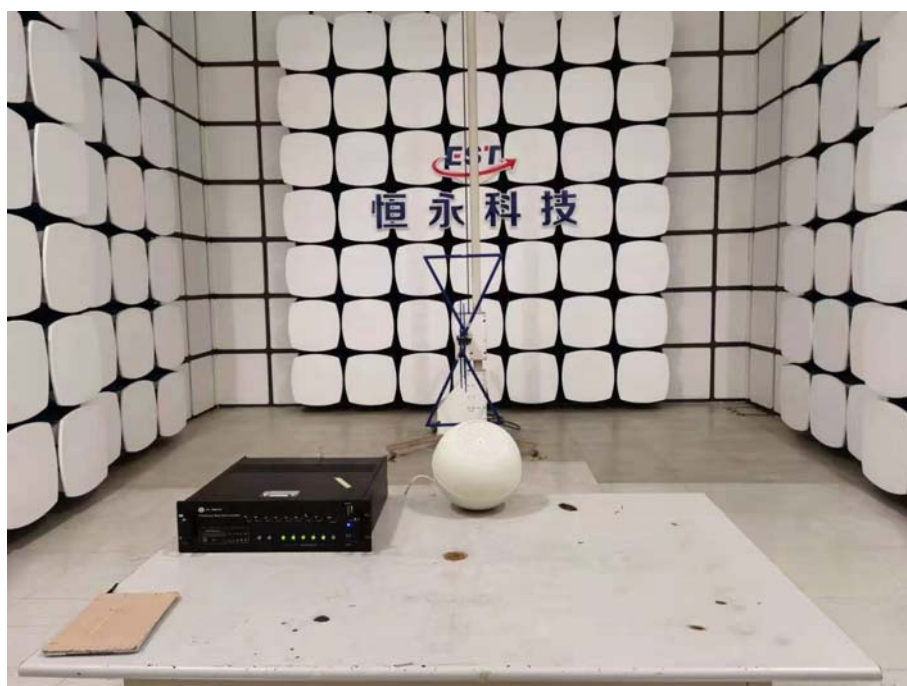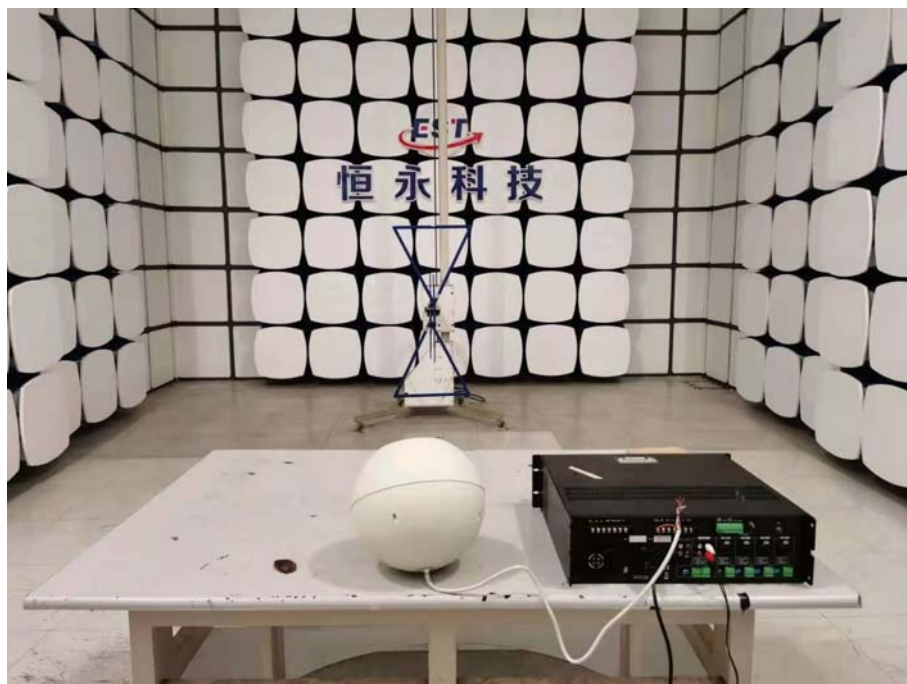


6.2. Set-up for Electrostatic Discharge Immunity Test



6.3. Set-up for Radio Frequency Electromagnetic Field Immunity Test



6.4.Set-up for Power Frequency Magnetic Field Immunity Test

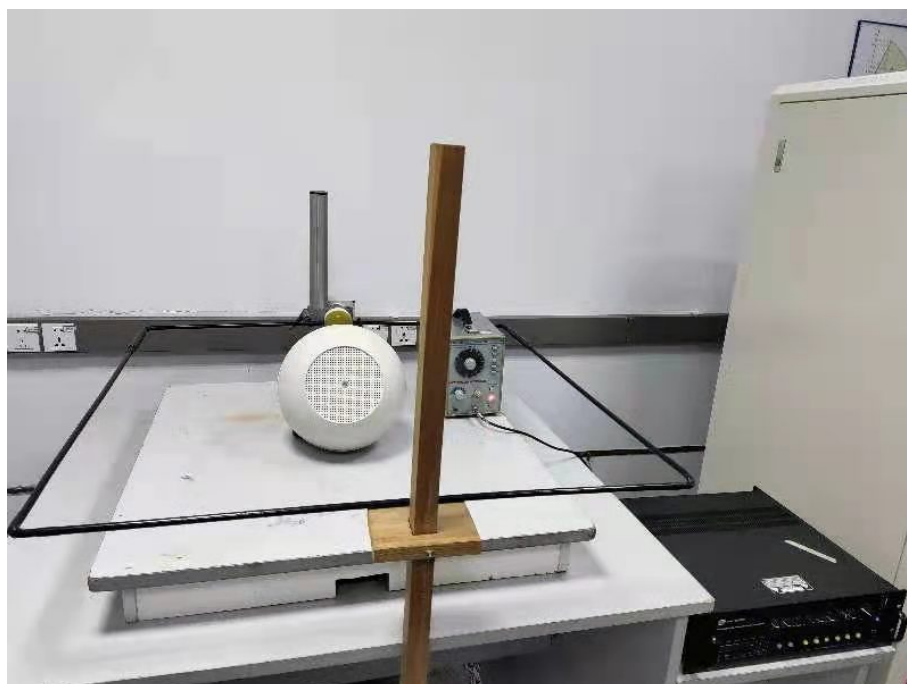

7. PHOTOGRAPHS OF THE EUT

M/N: CSP-115D

Figure 1

General Appearance of the EUT



Figure 2

General Appearance of the EUT




Figure 3
General Appearance of the EUT



Figure 4
Inside View of the EUT



Figure 5
Inside View of the EUT

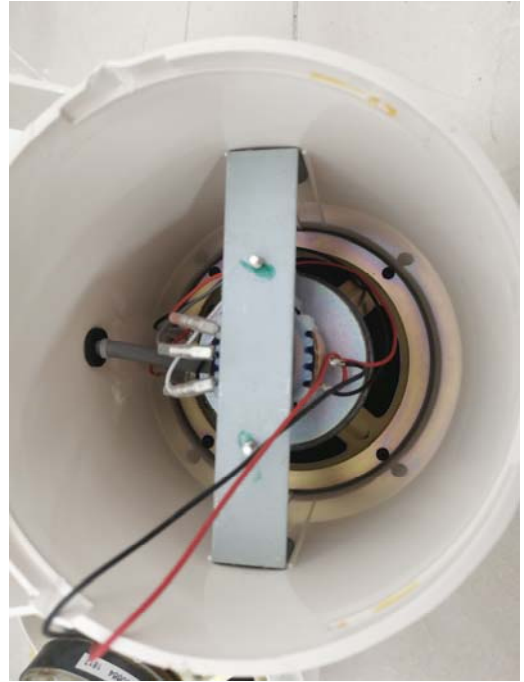

M/N: CSP-220D

Figure 6

General Appearance of the EUT



Figure 7

General Appearance of the EUT




Figure 8
General Appearance of the EUT



Figure 9
Inside View of the EUT



Figure 10
Inside View of the EUT

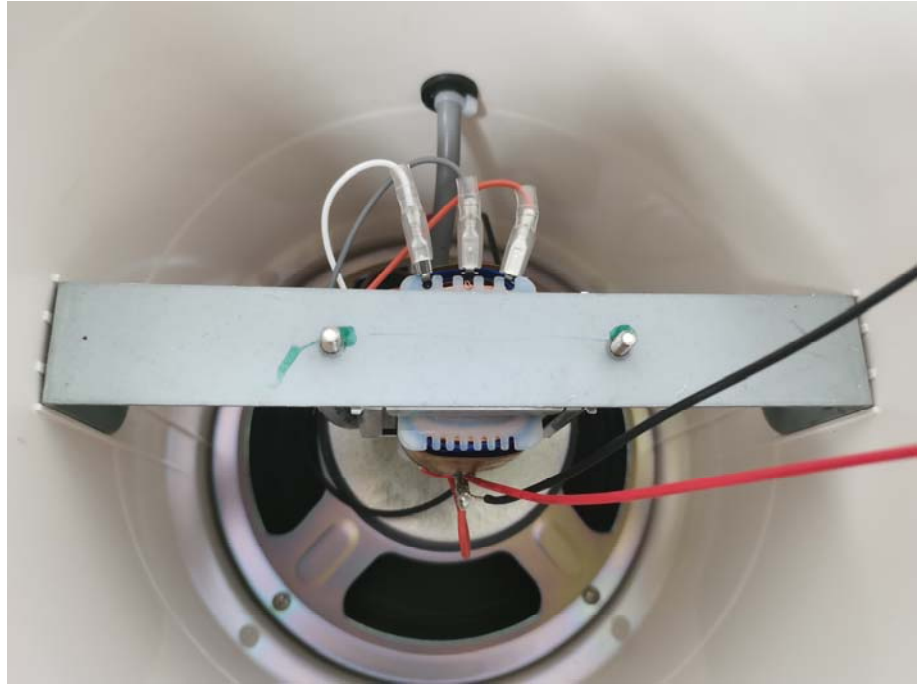

M/N: CSR-306Y

Figure 11

General Appearance of the EUT



Figure 12

General Appearance of the EUT



Figure 13
General Appearance of the EUT



Figure 14
Inside View of the EUT



Figure 15
Inside View of the EUT



End of Test Report